

ASSEMBLY INSTRUCTIONS

Gemini Chandelier

LIGHTING

CAUTION

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with Ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.


Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS INVENTORY		
ID	DESCRIPTION	QTY
A	MOUNTING PLATE	1
B	MOUNTING PLATE SCREWS	2
C	CANOPY	1
D	CANOPY SCREW	4

PARTS INVENTORY		
ID	DESCRIPTION	QTY
E	PENDANT	1
F	BULB (NOT INCLUDED)	2
G	EXTENTION PIPE 18", 12", 6" (2 PCS PER SIZE)	6
H	SHADE	2

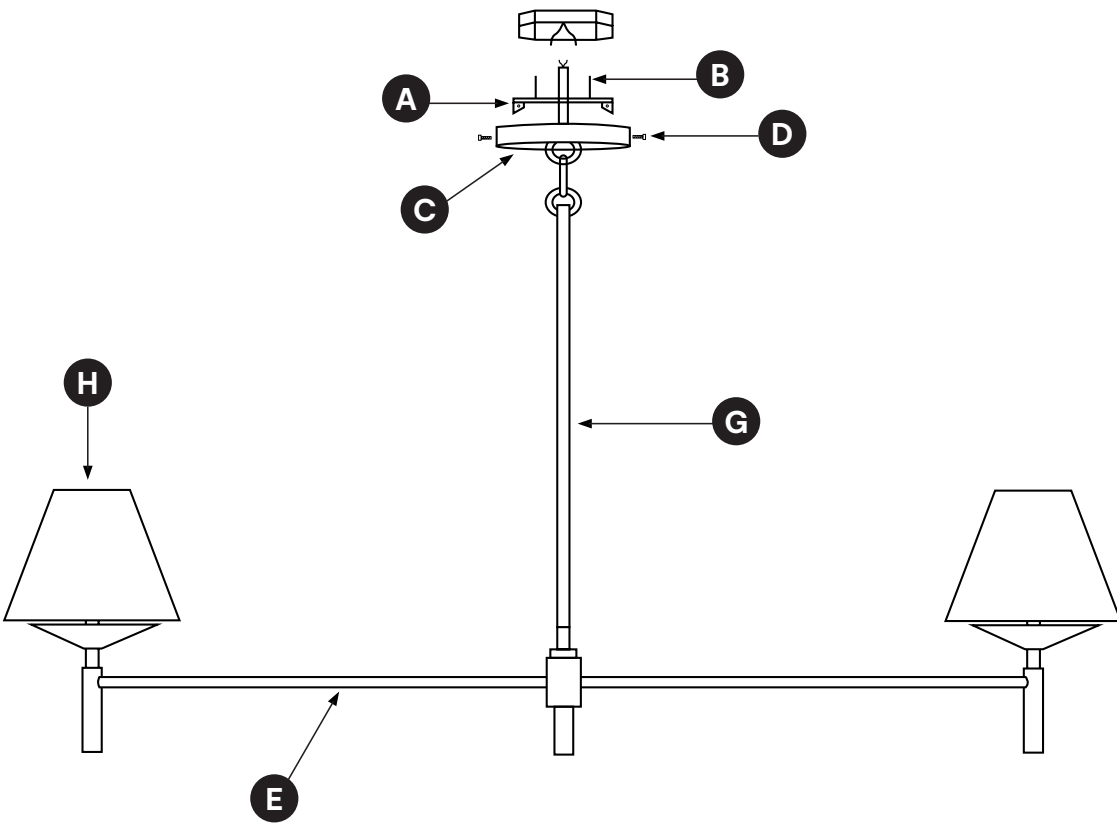

ASSEMBLY INSTRUCTIONS

1. TURN OFF POWER TO THE OUTLET BOX WHERE THE CEILING LIGHT WILL BE INSTALLED.

2. Included are (2) 6" pipe, (2) 12" pipe and (2) 18" pipes. Determine which of these you will need to reach your desired length. Pass the attached electric cable through the desired amount of pipes, keeping the threaded part of the pipes toward the ceiling.

3. Finally, tighten the **PIPE (G)** to ring / bush below the canopy.

4. Remove the **MOUNTING PLATE (A)** from the **CANOPY (C)** by unscrewing **TOP SCREW (D)**.

5. Attach Terminal **MOUNTING PLATE (A)** to the ceiling Outlet Box.

6. Attach the Ground Wire, Neutral wire & Live wire to respective wires of the Outlet Box.

7. Install the **CANOPY (C)** to **MOUNTING PLATE (A)** and fix it by **CANOPY SCREW (D)**.

8. Fix the **SHADE (H)** on the Socket by tightening with the Phenolic Shade Ring.

9. Install 2 E12 bulbs maximum 4.5 Watt into the Socket.

10. Restore Power to the Outlet box and test ceiling light fixture.

CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.