

Lorraine Dining Table


ASSEMBLY INSTRUCTIONS

ASSEMBLY INSTRUCTIONS

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting. When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.


PARTS INVENTORY		
ID	DESCRIPTION	QTY
1	TOP	1
2	LEAF	1
3	LEG	2
4	TOP STRECHER	1
5	BOTTOM STRECHER	1

HARDWARE INVENTORY				
ID	IMAGE	DESCRIPTION	SIZE	QTY
A		ALLEN BOLT	M8 x 60mm	2
B		ALLEN BOLT	M8 x 40mm	12
C		LOCK WASHER	12 x 8.5mm	14
D		FLAT WASHER	19 x 8.5mm	14
E		ALLEN KEY	5 X 110mm	1
F		LEVELING GLIDE	M8 X 35mm	4
G		LOCK		4

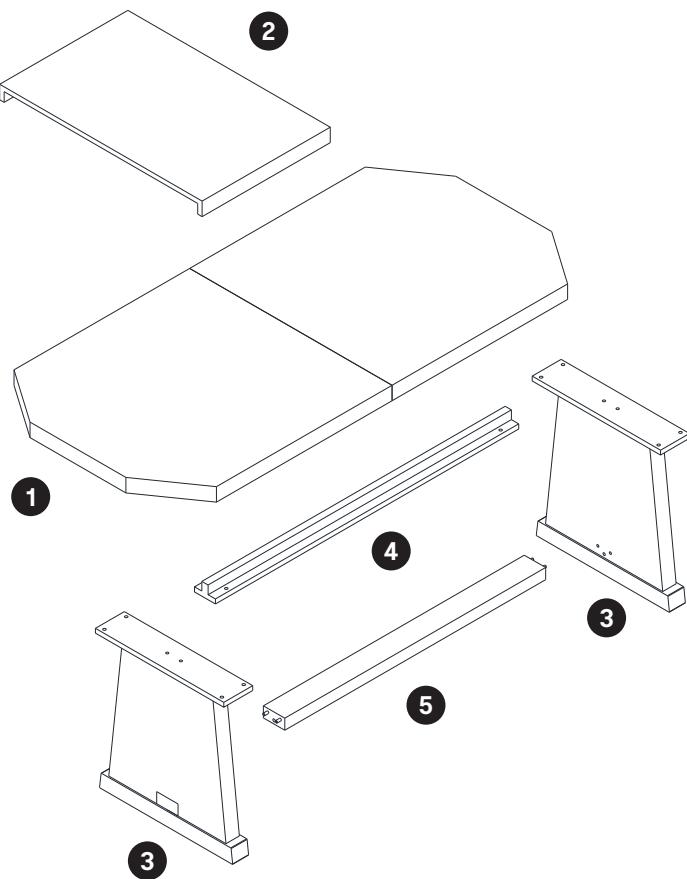


STEP 1

Place the **LEGS (3)** upside down and attach the **BOTTOM STRETCHER (5)**, making sure the bolt holes are aligned. Slide a **LOCK WASHER (C)**, followed by a **FLAT WASHER (D)**, onto the **ALLEN BOLT (A)**. Using the **ALLEN KEY (E)**, tighten the **ALLEN BOLT (A)** to secure the connection. Repeat this process for all remaining bolts.

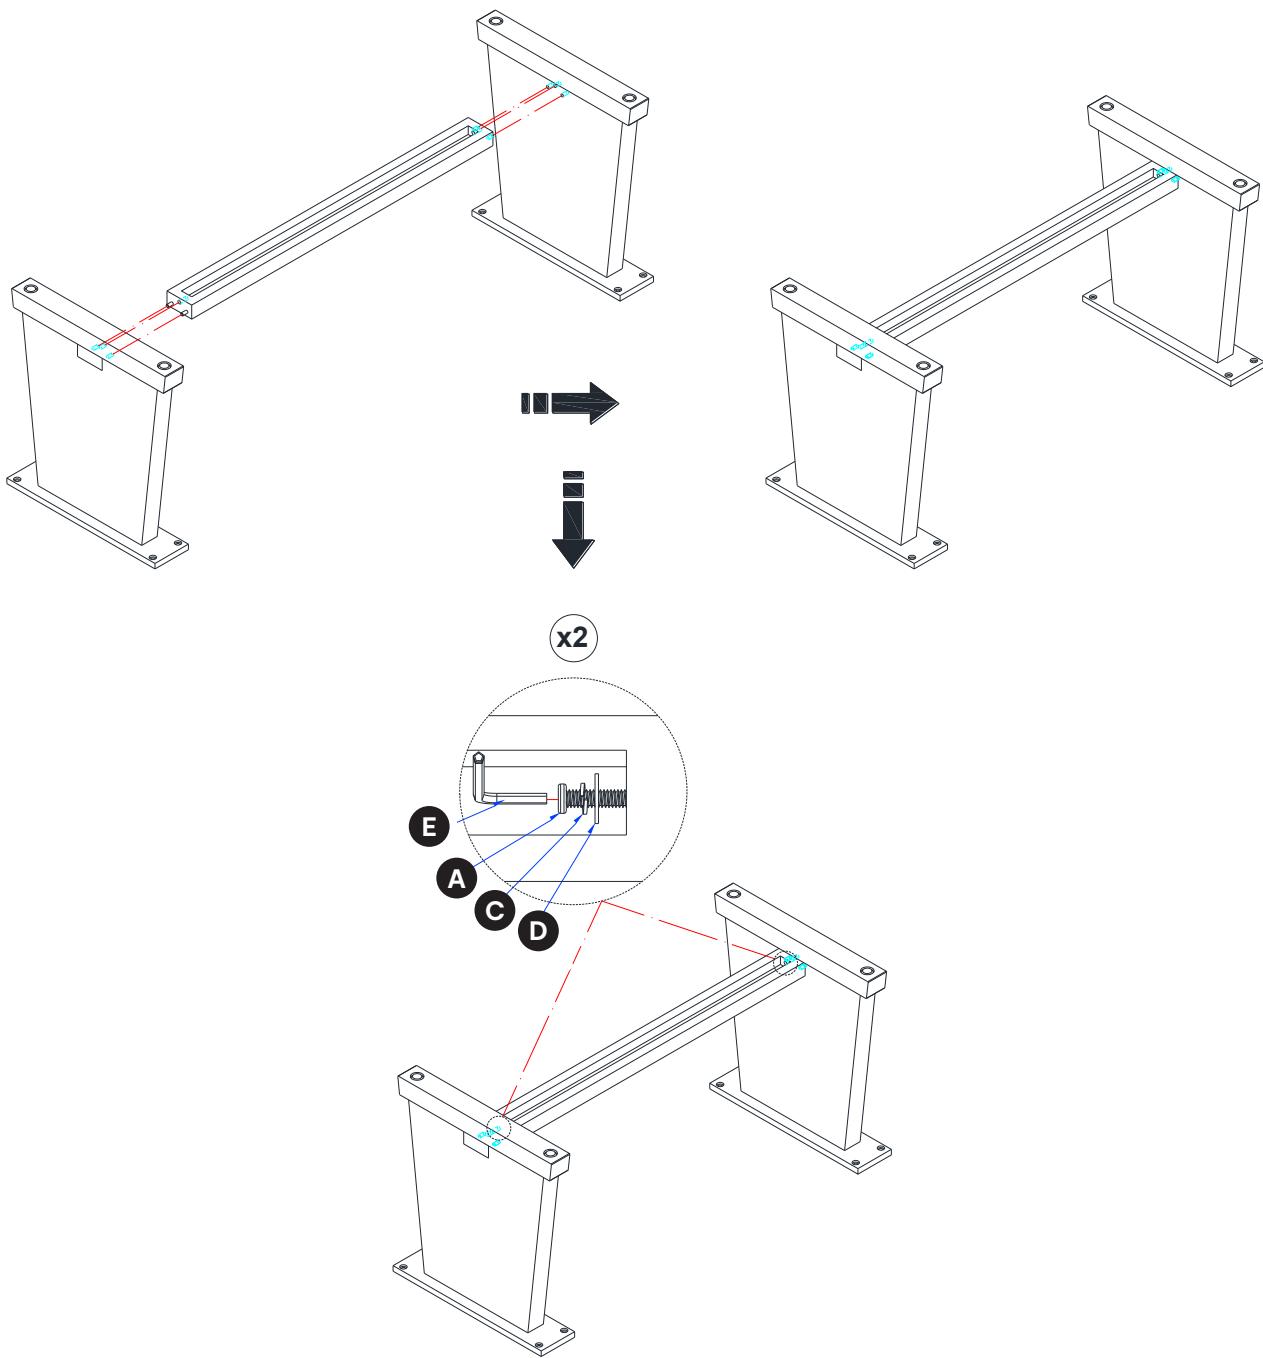


STEP 2

Turn the **LEGS (3)** right side up and place the **TOP STRETCHER (4)** onto of the legs, making sure the bolt holes are aligned. Slide a **LOCK WASHER (C)**, followed by a **FLAT WASHER (D)**, onto the **ALLEN BOLT (B)**. Using the **ALLEN KEY (E)**, tighten the **ALLEN BOLT (B)** to secure the connection. Repeat this process for all remaining bolts.

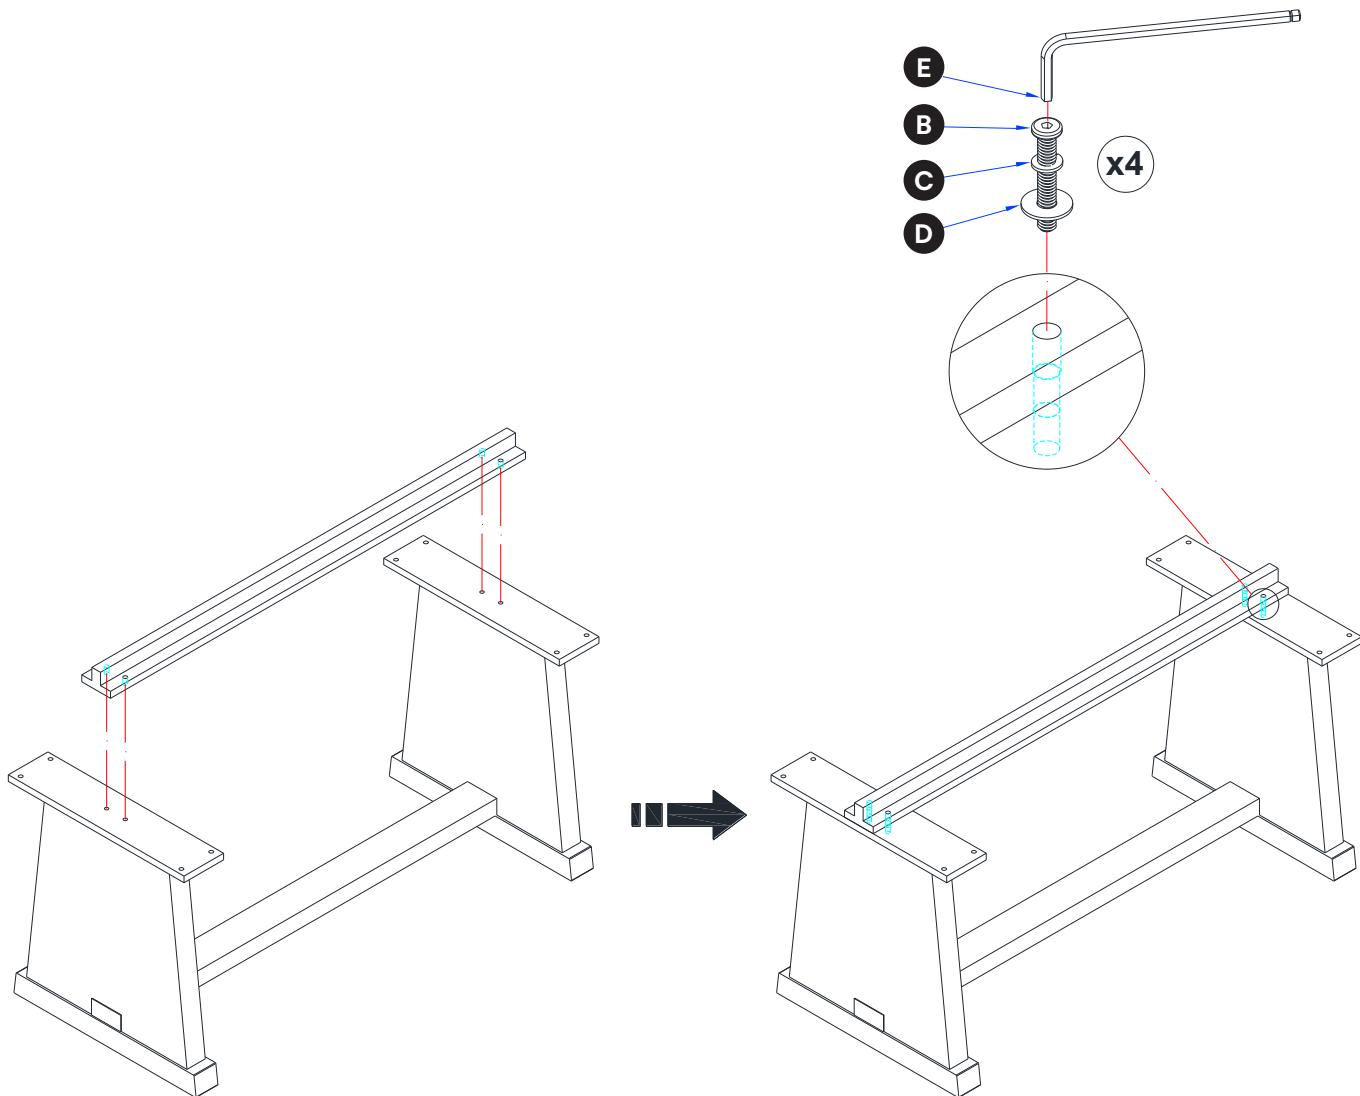


STEP 3

Place the table **TOP (1)** upside down and position the leg assembly onto it, making sure the bolt holes are aligned. Slide a **LOCK WASHER (C)**, followed by a **FLAT WASHER (D)**, onto the **ALLEN BOLT (B)**. Align the bolt holes on the leg assembly and attach it to the bottom of the table top using the **ALLEN KEY (E)** to tighten the **ALLEN BOLT (B)**. Repeat this process for all remaining bolts.

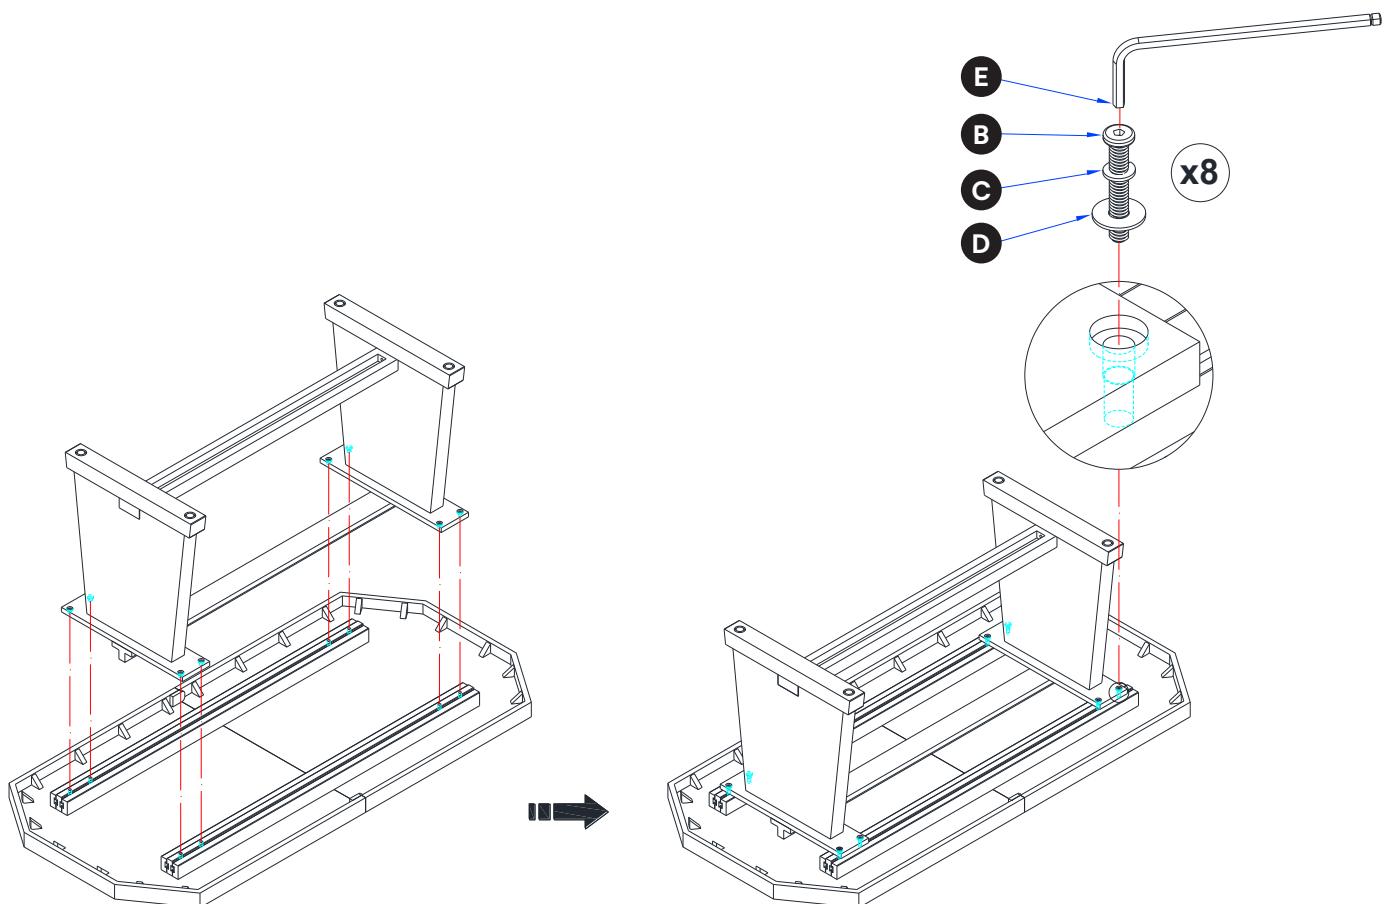

STEP 4

Turn the table right side up. The **LEVELING GLIDE (F)** is located at the bottom of the table legs. Once the table is in the desired position, you can adjust the leveling glides depending on the surface. Make sure the table is level and stable. Once it is properly leveled, the assembly is complete.

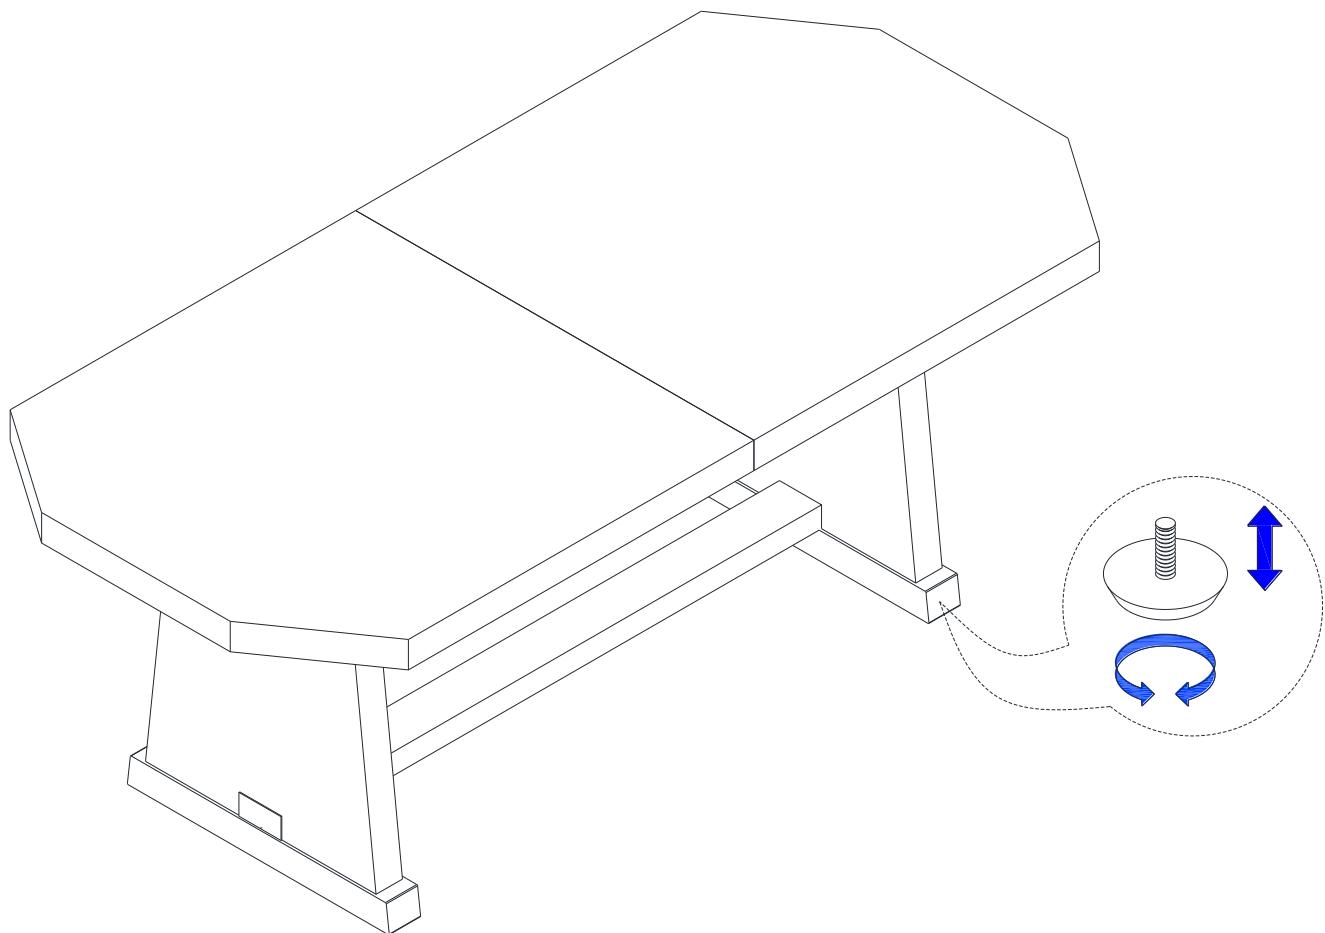

STEP 5

To extend the table, unlock the **LOCK (G)** mechanism from the bottom of the table **TOP (1)** and separate the table top ends by pulling them in opposite directions. Next, place and align the **LEAF (2)** in the center, secure the table top ends, and then lock the **LOCK (G)** mechanism securely.

