

Dora Pendant Light

LIGHTING

JOON LOLOI

⚠ CAUTION

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

⚠ IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with Ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

⚠ WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**

PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.


Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

| PARTS INCLUDED | | |
|----------------|-----------------------------|-----|
| ID | DESCRIPTION | QTY |
| A | CEILING OUTLET JUNCTION BOX | 1 |
| B | GROUND JUNCTION BOX WIRE | 1 |
| C | HOT JUNCTION BOX WIRE | 1 |
| D | NEUTRAL JUNCTION BOX WIRE | 1 |

| PARTS INCLUDED | | |
|----------------|----------------------|-----|
| ID | DESCRIPTION | QTY |
| E | HOT FIXTURE WIRE | 1 |
| F | MOUNTING BRACKET | 1 |
| G | MOUNTING SCREWS | 2 |
| H | CANOPY | 1 |
| I | WIRE CONNECTORS | 3 |
| J | NEUTRAL FIXTURE WIRE | 1 |
| K | GROUND WIRE | 1 |
| L | GROUND SCREW | 1 |
| M | HEX NUT | 2 |
| N | NIPPLE | 1 |
| O | LOCK WASHER | 1 |
| P | SCREW COLLAR LOOP | 1 |
| Q | THREADED RING | 1 |
| R | CHAIN | 2 |
| S | FIXTURE BODY | 1 |

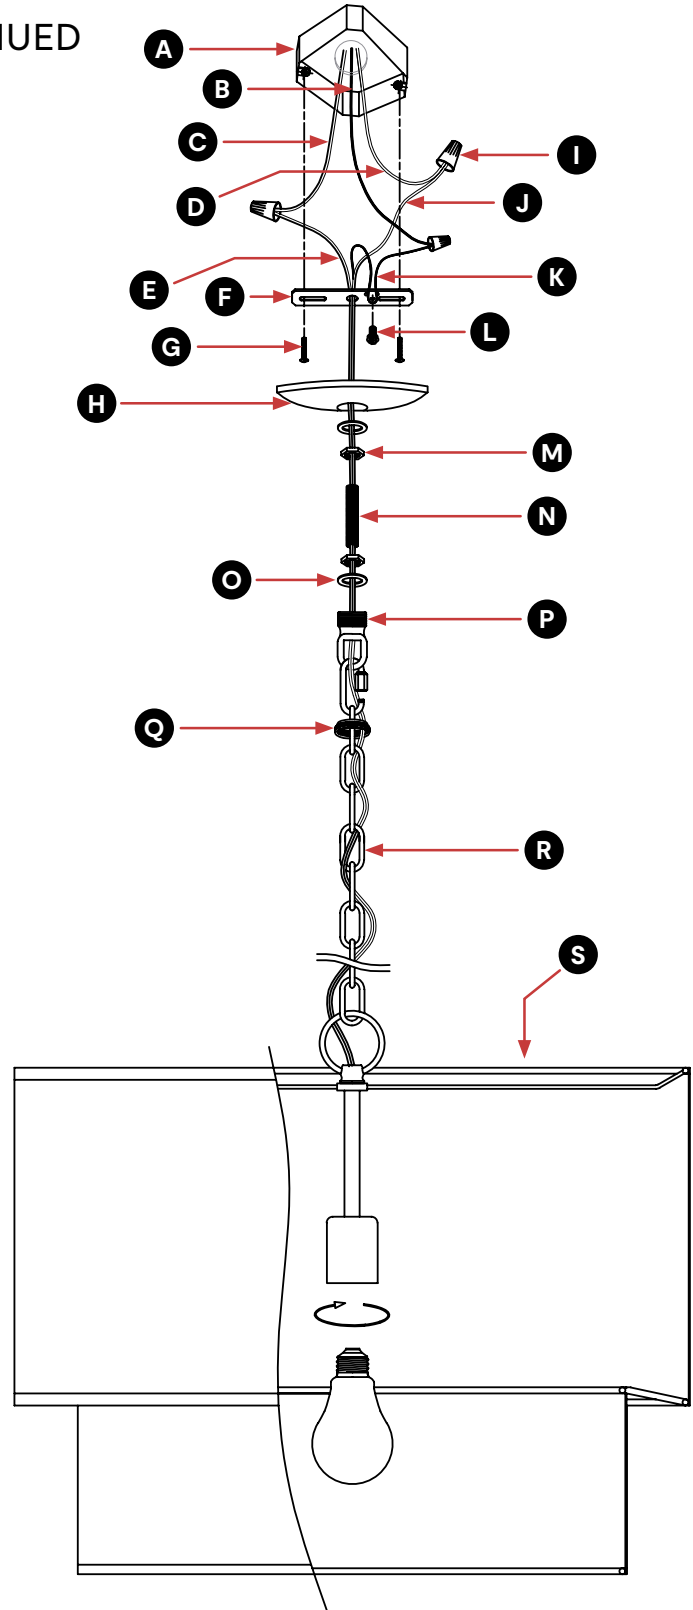

TOOLS REQUIRED (NOT INCLUDED)

Philips Head & Flat Blade Screwdrivers, Pliers, Wire Cutter/Stripper & Electrical Tape, Wire Connectors, & Adjustable Wrench.

NOTE: THE DRAWING OF THE CANOPY IS FOR REFERENCE ONLY.

JOON LOLOI

ASSEMBLY INSTRUCTIONS

- 1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!**
- Carefully unpack all fixture parts and hardware and lay them out on a clear workspace.
- Gently pull existing **GROUND (B)**, **HOT (C)**, and **NEUTRAL (D) JUNCTION BOX WIRES** down from the **CEILING JUNCTION BOX (A)** and allow these to hang.
- Carefully inspect the wires on the chandelier fixture. **THE NEUTRAL FIXTURE WIRE (J)** is ribbed. **THE HOT FIXTURE WIRE (E)** is smooth, and the **GROUND WIRE (K)** is silver.
- Attach the **GROUND WIRE (K)** from the fixture to the **GROUND JUNCTION BOX WIRE (B)**; it usually has green insulation around it or is bare wire. Fasten these together with a **WIRE CONNECTOR (I)** and wrap the connection with electrical tape. Make sure no wire strands are exposed. If your **CEILING OUTLET JUNCTION BOX (A)** does not have a Ground Junction **BOX WIRE (B)**, insert the **GROUND SCREW (L)** into the **MOUNTING BRACKET (F)** where it is marked "Ground" and wrap the bare ground wire from the chandelier around the **GROUND SCREW (L)**. Tighten the screw to clamp the **GROUND WIRE (K)** between the **GROUND SCREW (L)** head and the **MOUNTING BRACKET (F)**. It is imperative that the **CEILING JUNCTION BOX (A)** in your home be properly grounded.
- Connect the **NEUTRAL FIXTURE WIRE (J)** to the **NEUTRAL JUNCTION BOX WIRE (D)**; it usually has white insulation around it. Fasten these together with a plastic **Wire Connector (I)** and wrap the connection with electrical tape. Make sure that no wire strands are exposed.
- Connect the **HOT FIXTURE WIRE (E)** to **HOT JUNCTION BOX WIRE (C)**; it usually has black insulation around it. Fasten these together with a plastic **WIRE CONNECTOR (I)** and wrap the connection with electrical tape. Make sure that no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
- Gently tuck the wire connections neatly into the **CEILING OUTLET JUNCTION BOX (A)**.
- Attach the **MOUNTING BRACKET (F)** to the **CEILING OUTLET JUNCTION BOX (A)** using the **MOUNTING SCREWS (G)**. Tighten screws with a screwdriver until secure.
- Attach one **HEX NUT (M)** to the top and the other **HEX NUT (M)** to the bottom of the **NIPPLE (N)**. Put the **LOCK WASHER (O)** in before attaching the **SCREW COLLAR LOOP (P)** to the bottom end of the **Nipple (N)**.
- Secure the top of the **NIPPLE (N)** to the **MOUNTING BRACKET (F)** with the **HEX NUT (M)**, exposing approximately 2" of the thread. Then secure the **SCREW COLLAR LOOP (P)** to the bottom end of the **NIPPLE (N)** with the **HEX NUTS (M)** and **LOCK WASHER (O)**.
- Slide the **CANOPY (H)** and the **THREADED RING (Q)** up the **CHAIN (R)**.
- Place the **CANOPY (H)** over the **CEILING OUTLET JUNCTION BOX (A)** and secure it in place by screwing the **THREADED RING (Q)** onto the **SCREW COLLAR LOOP (P)**.
- Insert one (1) 100-Watt maximum Type A Candelabra incandescent light bulbs (not included) or one (1) 23-watt maximum compact fluorescent light bulb (not included) or one (1) 20-watt maximum LED light bulb (not included) into the socket. Do not exceed the specified wattage.

CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth.
- AVOID cleaners, harsh chemicals, scouring pads, etc. as these may cause damage to the chandelier finish.