

ASSEMBLY INSTRUCTIONS

Riga Pendant Light

LIGHTING

CAUTION

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**

PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.


Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS GROUPED		
PARTS	REPLACEMENT PART/GROUP NAME	NUMBER
A,B,C,D,E,F,G	HARDWARE KIT	HDW-04
H,I,J	CANOPY ASSEMBLY	CAS-3215
K	CHAIN	CHN-PN1023-SET

PARTS INCLUDED		
ID	DESCRIPTION	QTY
A	MOUNTING PLATE	1
B	MOUNTING SCREWS	?
C	NIPPLE	1
D	TOOTH WASHER	1
E	HEX NUT	1
F	GROUND SCREW	1
G	WIRE NUT	1
H	COLLAR LOOP	1
I	SCREW COLLAR	1
J	CANOPY	1
K	CHAIN	1
L	FIXTURE ASSEMBLY	1

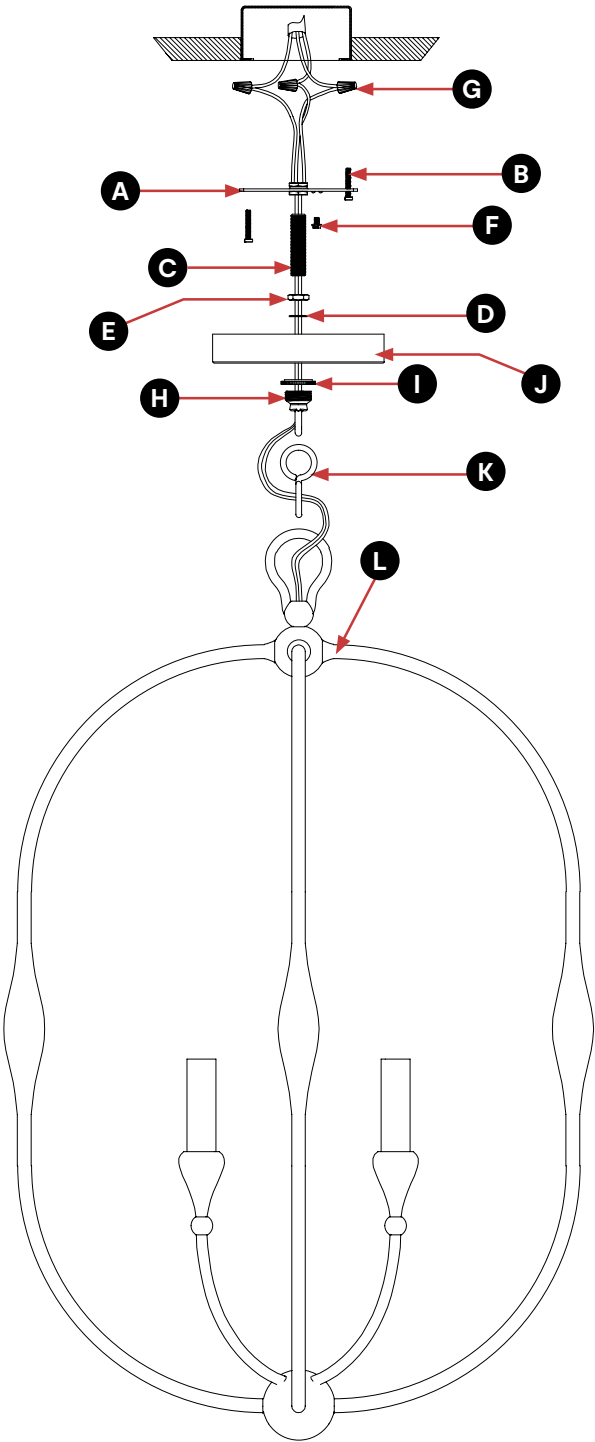

TOOLS REQUIRED (NOT INCLUDED)

Philips Head & Flat Blade Screwdrivers, Pliers, Wire Cutter/Stripper & Electrical Tape, Wire Connectors, & Adjustable Wrench.

NOTE: THE DRAWING OF THE CANOPY IS FOR REFERENCE ONLY.

ASSEMBLY INSTRUCTIONS

1. Attach the **MOUNTING PLATE (A)** onto the junction box using the **MOUNTING SCREWS (B)**. This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
2. Remove the **SCREW COLLAR (I)** from the **COLLAR LOOP (H)**. Fully thread the **NIPPLE (C)** onto the **COLLAR LOOP (H)**. Thread the **HEX NUT (E)** onto the **NIPPLE (C)** along with **TOOTH WASHER (D)**. Then thread the **NIPPLE (C)** unto the **MOUNTING PLATE (A)**. Adjust the **NIPPLE (C)** so that the threads of the **COLLAR LOOP (H)** extends .25" beyond the **CANOPY (J)**. Secure using **HEX NUT (E)**.
3. Open the end link the of the **CHAIN (K)** and attach to the **FIXTURE ASSEMBLY (L)** at the desired height. Slide the **SCREW COLLAR (I)** and the **CANOPY (J)** onto the **CHAIN (K)**. Open the link on the other end of the **CHAIN (K)** then attach unto the **COLLAR LOOP (H)**. Feed the wires through the **CHAIN (K)**, **SCREW COLLAR (I)**, **CANOPY (J)**, **COLLAR LOOP (H)**, **NIPPLE (C)**, and **MOUNTING PLATE (A)**.
4. Cut off excess wires, and strip the insulation off the end of the leads.
5. Attach the Ground wire to the ground inside the junction box (Generally green or bare copper wire) or the **GROUND SCREW (F)** on the **MOUNTING PLATE (A)**. **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
6. Connect the fixture's **SPT Neutral (SPT WIRE WITH NO WRITINGS)** wire lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (**WIRE NUT (G)**). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
7. Connect the fixture's **SPT hot (SPT WITH WRITNGS)** wire lead to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH.**
8. Push the wires back into the junction box. Lift up the **CANOPY (J)** up to the ceiling, and screw the **SCREW COLLAR(I)** onto the **COLLAR LOOP (H)**.
9. Screw the bulb (not included) into the socket of the **FIXTURE ASSEMBLY (L)**. **THIS FIXTURE IS RATED FOR 8 WATT TYPE G16.5 LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
10. Restore power to the outlet at the breaker or fuse box.

CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth.
- AVOID cleaners, harsh chemicals, scouring pads, etc. as these may cause damage to the chandelier finish.