

## ASSEMBLY INSTRUCTIONS

# Maxine Chandelier

---

LIGHTING

## CAUTION

**BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.**

## IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with Ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

## WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

## PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.


Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS INVENTORY		
ID	DESCRIPTION	QTY
1	MOUNTING PLATE	1
2	MOUNTING SCREWS	2
3	SCREW COLLAR	1
4	COLLAR LOOP	1
5	NIPPLE	1
6	HEX NUT	2
7	TOOTH WASHER	1
8	CANOPY	1

PARTS INVENTORY		
ID	DESCRIPTION	QTY
9	CHAIN	1
10	FIXTURE ASSEMBLY	1
11	GROUND SCREW	1
12	WIRE NUT	2
13	G16.5 BULBS (not included)	3
14	SOCKET RING	3
15	SHADE	3

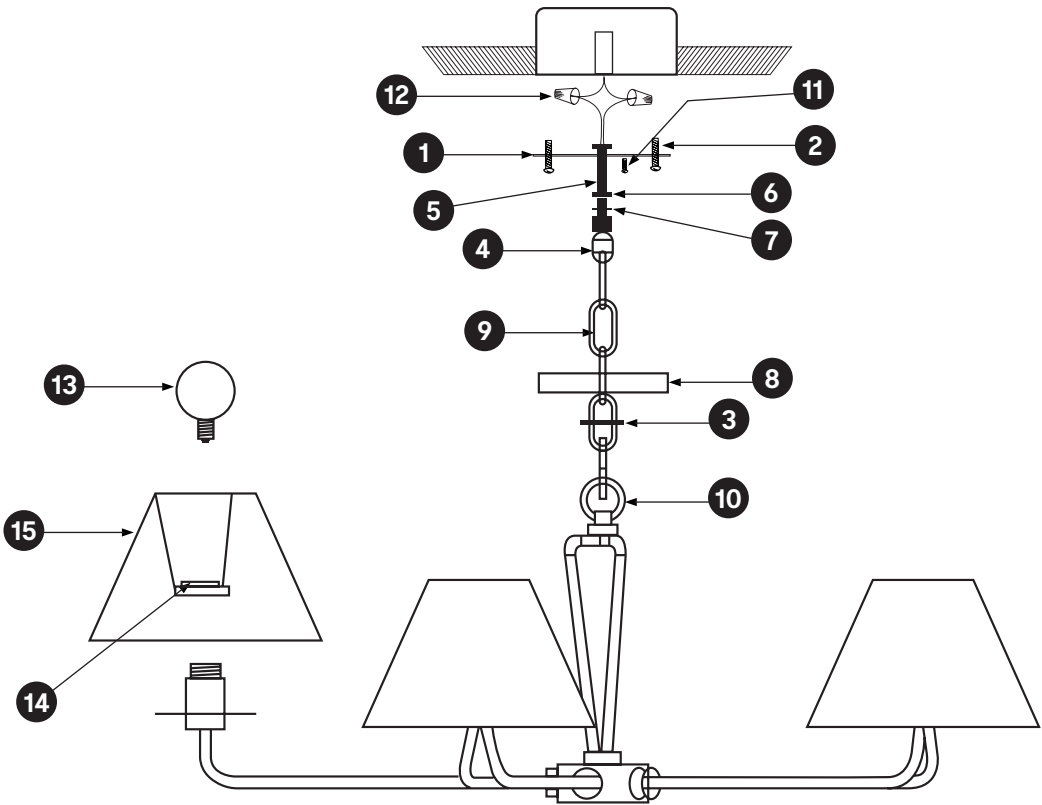

## ASSEMBLY INSTRUCTIONS

1. Attach the **MOUNTING PLATE (1)** onto the junction box using the **MOUNTING SCREWS (2)**. This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
2. Remove the **SCREW COLLAR (3)** from the **COLLAR LOOP (4)**. Fully thread the **NIPPLE (5)** onto the **COLLAR LOOP (4)**. Thread the **HEX NUTS (6)** onto the **NIPPLE (5)** along with **TOOTH WASHER (7)**. Then thread the **NIPPLE (5)** unto the **MOUNTING PLATE (1)**. Adjust the **NIPPLE (5)** so that the threads of the **COLLAR LOOP (4)** extends 1/4" beyond the **CANOPY (8)**. Secure using **HEX NUT (6)**.
3. Open the end link the of the **CHAIN (9)** and attach to the **FIXTURE ASSEMBLY (10)** at the desired height. Slide the **SCREW COLLAR (3)** and the **CANOPY (8)** onto the **CHAIN (9)**. Attach the other end of the **CHAIN (9)** unto the **COLLAR LOOP (4)**. Feed the wires through the **CHAIN (9)**, **SCREW COLLAR (3)**, **CANOPY (8)**, **COLLAR LOOP (4)** and **NIPPLE (5)**.
4. Cut off excess wires, and strip the insulation off the end of the leads.
5. Attach the Ground wire (Green) to the ground inside the junction box (Generally green or bare copper wire) or the **GROUND SCREW (11)** on the **MOUNTING PLATE (1)**. **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
6. Connect the fixture's SPT Neutral (SPT WIRE WITH NO WRITINGS) wire lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (**WIRE NUT (12)**). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
7. Connect the fixture's SPT hot (SPT WITH WRITNGS) wire lead to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
8. Push the wires back into the junction box. Lift up the **CANOPY (8)** up to the ceiling, and screw the **SCREW COLLAR (3)** onto the **COLLAR LOOP (4)**.
9. Screw the **G16.5 BULB (13)** into the **SOCKET** of the **FIXTURE ASSEMBLY (5)**. **THIS FIXTURE IS RATED FOR 40 WATT LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
10. Attach the **SHADE (15)** into the **FIXTURE ASSEMBLY (10)** using the **SOCKET RING (14)**. Secure the **SHADE (15)** by reaching inside the **SHADE (15)** and threading the **SOCKET RING (14)** to the exposed thread on the **FIXTURE ASSEMBLY (10)**.
11. Restore power to the outlet at the breaker or fuse box.

## CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.