

# Brent Pendant Light

---

LIGHTING

# JOON LOLOI

---

## **⚠ CAUTION**

**BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.**

## **⚠ IMPORTANT SAFETY INSTRUCTIONS**

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- This lighting fixture has been rated for up to one (1) 25 WATT maximum E26 bulb.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use.
- Save these instructions.

## **⚠ WARNING**

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

## **PRE-ASSEMBLY INSTRUCTIONS**

Remove all parts and hardware from box along with any plastic protective packaging.


Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

# JOON LOLOI

## PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS INCLUDED		
ID	DESCRIPTION	QTY
<b>A</b>	MOUNTING PLATE	1
<b>B</b>	MOUNTING SCREWS	4
<b>C</b>	GROUND SCREW	1
<b>D</b>	WIRE NUT	2
<b>E</b>	NIPPLE	1
<b>F</b>	SCREW COLLAR LOOP	1
<b>G</b>	SCREW COLLAR	1
<b>H</b>	CANOPY	1
<b>I</b>	CHAIN	1
<b>J</b>	FIXTURE ASSEMBLY	1
<b>K</b>	TOP GLASS	1
<b>L</b>	RING A	1
<b>M</b>	HOLDER	1
<b>N</b>	RING B	1
<b>O</b>	PIN	1
<b>P</b>	BULB	1
<b>Q</b>	BOTTOM GLASS	1

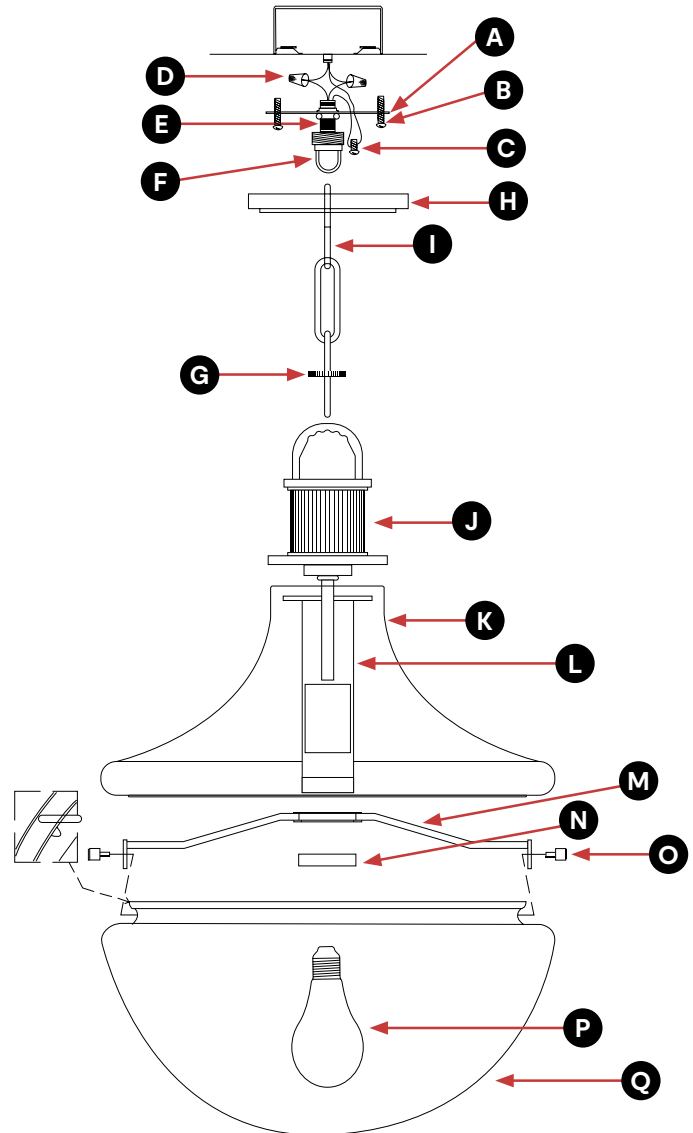

## ASSEMBLY INSTRUCTIONS

1. Attach the **MOUNTING PLATE (A)** onto the junction box using the **MOUNTING SCREWS (B)**. This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
2. Open the end link on the **CHAIN (I)** and attach to the loop on the **FIXTURE ASSEMBLY (J)**. Hang the **FIXTURE ASSEMBLY (J)** on the **CHAIN (I)** at your desired height, and remove excess **CHAIN (I)**.
3. Feed the wire through the **CHAIN (I)**, **SCREW COLLAR (G)**, **CANOPY (H)**, **SCREW COLLAR LOOP (F)**, **NIPPLE (E)**, and **MOUNTING PLATE (A)**, and screw the **NIPPLE (E)** onto the **MOUNTING PLATE (A)**.
4. Open the top link on the **CHAIN (I)**, and Hang the **FIXTURE ASSEMBLY (J)** to the **SCREW COLLAR LOOP (F)**.
5. Cut off excess wire, and strip the insulation off the end of the leads.
6. Attach the Ground wire (Green) to the ground inside the junction box (Generally green or bare copper wire) or the **GROUND SCREW (C)** on the **MOUNTING PLATE (A)**. **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
7. Connect the fixture lead the ridge(s) to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (**WIRE NUT (D)**). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OR STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
8. Connect the smooth fixture leads with to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
9. Attach the **TOP GLASS (K)** to the **FIXTURE ASSEMBLY (J)** and secure it with the **RING A (L)**.
10. Attach the **HOLDER (M)** to the **RING A (L)** and secure it with the **RING B (N)**.
11. Push the wires back into the junction box. Lift up the **CANOPY (H)** up to the ceiling, and secure with the **SCREW COLLAR (G)**.
12. Screw the **BULB (P)** up into the **SOCKET** of the fixture. **THIS FIXTURE IS RATED FOR MAX 25 WATT LED TYPE A21 LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
13. Lift the **BOTTOM GLASS (Q)** into the **HOLDER (M)** and secure it with the **PIN (O)**.
14. Restore power to the outlet at the breaker or fuse box.

## CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.