### **ASSEMBLY INSTRUCTIONS**

# Darlene Chandelier

**LIGHTING** 

### **A CAUTION**

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

### 

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with Ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

### **⚠ WARNING**

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.
- This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects
  and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light
  fixture.

### PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.

Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

### PRE-ASSEMBLY INSTRUCTIONS CONTINUED


PARTS INVENTORY				
ID	DESCRIPTION		QTY	
A	CANOPY	0	1	
B	MOUNTING PLATE		1	
0	SHADE RING		4	
D	BODY		1	
<b>3</b>	BULBS		4	
<b>6</b>	ALLEN KEY M2		1	

PARTS INVENTORY				
ID	DESCRIPTION		QTY	
G	PIPE 6"		2	
•	PIPE 12"		2	
0	PIPE 18"		2	
0	SHADE		4	




## STEP 1

Unlock the **SHADE RING (C)** from holder cover.

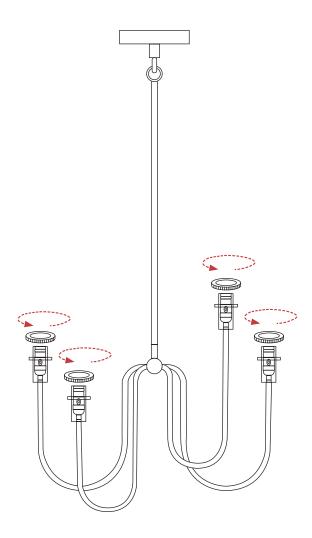


### STEP 2


A) Unlock the canopy screw to remove the **MOUNTING PLATE (B)**.



B) Fix Mounting Plate.




C) Adjust Extension Pipes.



STEP 3

Insert E12 25 WATT maximum **BULBS (E)**. Tighten each shade with ring as above.

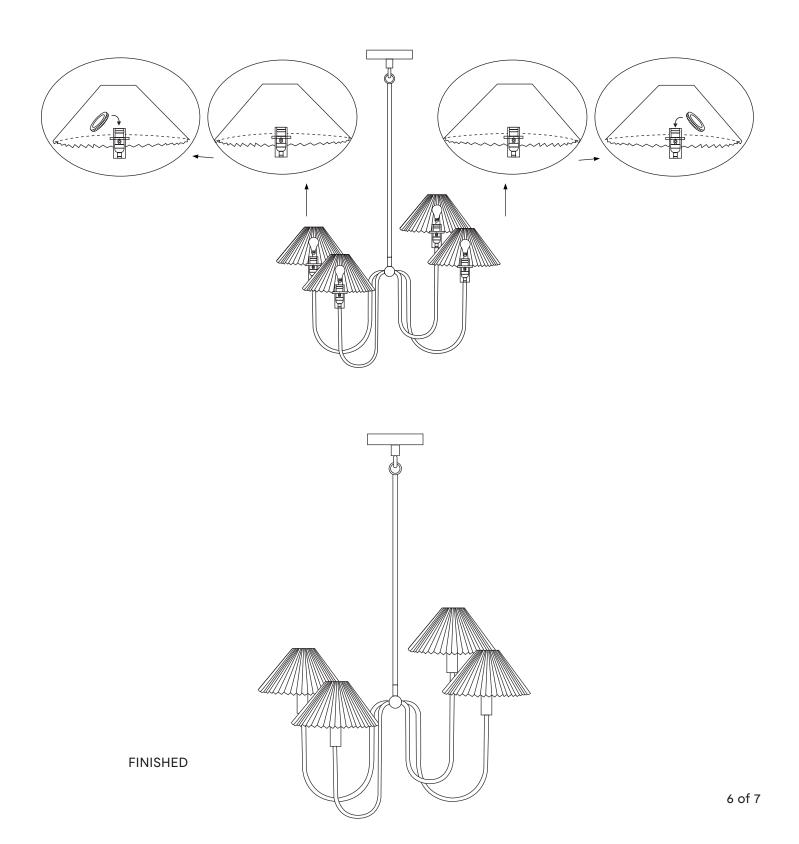

### WIRING CONNECTIONS

- 1. Shut down the power at the breaker panel.
- 2. Connect wires:

Ground wire: Connect fixture ground wire (green) to supply ground wire Neutral wire: Connect fixture neutral wire (white) to supply neutral wire Hot wire: Connect fixture hot wire (black) to supply hot wire

3. Make sure all connections are tight, then carefully tuck into the junction box

### IMPORTANT SAFETY INSTRUCTIONS

Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type applications of chandeliers. The ceiling must have at least the capacity of holding 5 times the weight of the chandelier. For this fixture, a ceiling capacity of at least 48.5 Lb (22 kg) is required. It will require at least two people or a lifter to install. It is recommended to use 4 x 25 watt maximum type B standard Bulbs.

### CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.