ASSEMBLY INSTRUCTIONS

Lansing Pendant Lamp

LIGHTING

⚠ CAUTION

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

⚠ IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with Ground wire or equivalent protection.
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

⚠ WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.

Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS INCLUDED		
ID	DESCRIPTION	QTY
A	MOUNTING PLATE	1
B	MOUNTING SCREWS	2
C	GROUND SCREW	1
D	WIRE NUT	2
E	1/4 NIPPLE	1
F	STEM KIT	1
G	CANOPY	1
H	ALLEN KEY TOOLING	1
I	FIXTURE ASSEMBLY	1
J	STUDS	1
K	GLASS	1
L	HEADLESS SCREW	1
M	BULB	1

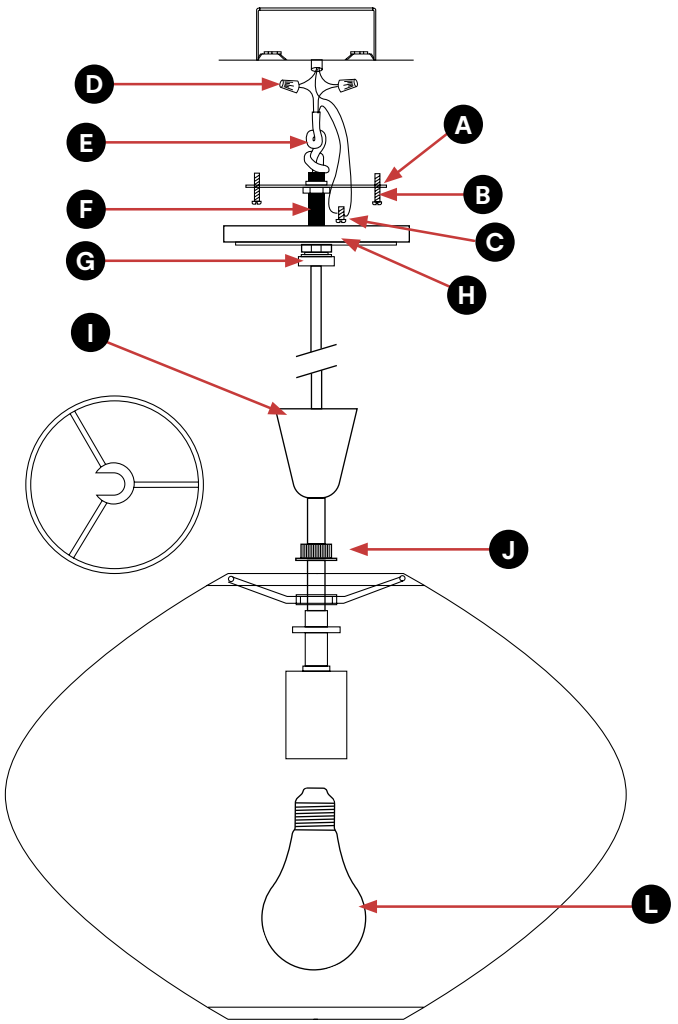

NOTE: THE DRAWING IS FOR REFERENCE ONLY.

ASSEMBLY INSTRUCTIONS

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Feed the **FIXTURE ASSEMBLY WIRE (I)** through the **SCREW COLLAR (G)**, **CANOPY (H)**, **NIPPLE (F)**, **MOUNTING PLATE (A)**, and **STRAIN RELIEF WASHER (E)** until you desired hanging height is met.
3.Tie an overhand knot to secure the wire in place above the **NIPPLE (F)**. Trim off excess wire minimum 6" beyond the knot and Strip each wire end 5/8"
4. Attach the **MOUNTING PLATE (A)** to the Junction box using the **MOUNTING SCREWS (B)**. This fixture is designed to be mounted to a standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
5.Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bar copper wire) or the **GROUND SCREW (C)** on the **MOUNTING PLATE (A)**. **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
6. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener **(WIRE NUT) (D)**. Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
7. Connect the black fixture leads to the hot (Generally black) wire in the outlet box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
Push the wires back into the junction box. Lift up the **CANOPY (H)** up to the ceiling, and screw the **SCREW COLLAR (G)** onto the **NIPPLE (F)**.
8. Install the **SHADE (K)** to **FIXTURE ASSEMBLY (I)** and secure with the **RING (J)**.
9. Screw the **BULB (L)** into the **SOCKET** of the fixture. **THIS FIXTURE IS RATED FOR 100 WATT E26 BASE BULB. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
10. Restore power to the outlet at the breaker or fuse box.

CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.