

ASSEMBLY INSTRUCTIONS

Tilney Pendant Light

LIGHTING

CAUTION

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**

PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.

Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS GROUPED		
PARTS	REPLACEMENT PART/GROUP NAME	NUMBER
A,B,C,D,E	HARDWARE KIT	HDW-04
F	STEM KIT	STM-LT1900-SET
G	CANOPY	CPY-2815
H	ALLEN WRENCH/KEY	TOL-2815
J	LED ASSEMBLY	LED-2820


PARTS GROUPED		
PARTS	REPLACEMENT PART/GROUP NAME	NUMBER
K	GLASS	GLS-2820
L	CAP	CAP-2820
M	DRIVER	DVR-2820

PARTS INCLUDED		
ID	DESCRIPTION	QTY
A	MOUNTING PLATE	1
B	MOUNTING SCREWS	2
C	GROUND SCREW	1
D	WIRE NUT	1
E	NIPPLE	1
F	STEM KIT	1
G	CANOPY	1
H	ALLEN WRENCH/KEY	1
I	FIXTURE ASSEMBLY	1
J	LED ASSEMBLY	1
K	GLASS	1
L	CAP	1

TOOLS REQUIRED (NOT INCLUDED)

Philips Head & Flat Blade Screwdrivers, Pliers, Wire Cutter/Stripper & Electrical Tape, Wire Connectors, & Adjustable Wrench.

NOTE: THE DRAWING OF THE CANOPY IS FOR REFERENCE ONLY.

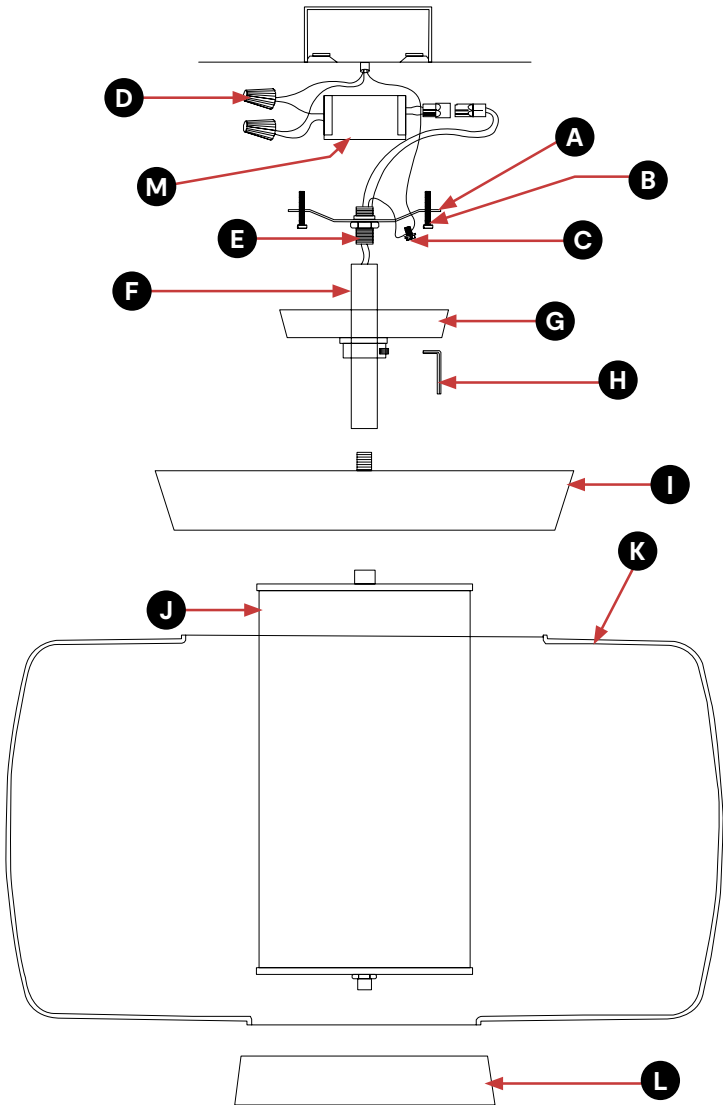

ASSEMBLY INSTRUCTIONS

1. Feed the wire through the **STEM KIT (F)** and twist tightly onto the **FIXTURE ASSEMBLY (I)**. Keep adding additional stems until you desired hanging height is met.
2. Slide in **CANOPY (G)** onto the **STEM KIT (F)**, and thread the 1/4 **NIPPLE (E)** onto the top end of the **STEM KIT (F)**.
3. Pull the wire out from the junction box, and install the **MOUNTING PLATE (A)** onto the junction box using the **MOUNTING SCREWS (B)**. This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
4. Trim off the excess wire to a minimum 6" beyond the **STEM** and strip each wire 5/8".
5. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bar copper wire) or the **GROUND SCREW (C)** on the **MOUNTING PLATE (A)**. **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
6. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (**WIRE NUT (D)**). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
7. Connect the black fixture leads to the hot (Generally black) wire in the outlet box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
8. Push the wires and **DRIVER (M)** back into the junction box.
9. Lift up the **CANOPY (G)** up to the ceiling, and secure with the **HEADLESS SCREW** by using supplied **ALLEN KEY TOOLING (H)**.
10. Screw the **LED (J)** up to the **FIXTURE ASSEMBLY (I)** of the fixture.
11. Lift the **GLASS (K)** up to the **FIXTURE ASSEMBLY (I)** and secure with the **CAP (L)**.
12. Restore power to the outlet at the breaker or fuse box.

CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth.
- AVOID cleaners, harsh chemicals, scouring pads, etc. as these may cause damage to the chandelier finish.