

ASSEMBLY INSTRUCTIONS

Ora Sconce Light

LIGHTING

CAUTION

BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3 wire, single phase electrical supply systems (provided with ground wire or equivalent protection).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- Save these instructions.

WARNING

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**

PRE-ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from box along with any plastic protective packaging.


Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

For your safety and convenience, assembly by two people is recommended.

PRE-ASSEMBLY INSTRUCTIONS CONTINUED

PARTS INCLUDED		
ID	DESCRIPTION	QTY
A	MOUNTING PLATE	1
B	MOUNTING SCREWS	2
C	GROUND SCREW	1
D	WIRE NUT	1
E	SET SCREWS	1
F	WALL ANCHORS	2
G	WOOD SCREWS	2
H	FIXTURE ASSEMBLY	1
I	RING	1
J	SHADE	1
K	SWITCH	1
L	PLUG	1

PARTS GROUPED		
PARTS	REPLACEMENT PART/GROUP NAME	NUMBER
A,B,C,D,E,F,G	HARDWARE KIT	HDW-HL699101
I	RING	RNG-HL699101
K	SHADE	SHD-HL699101

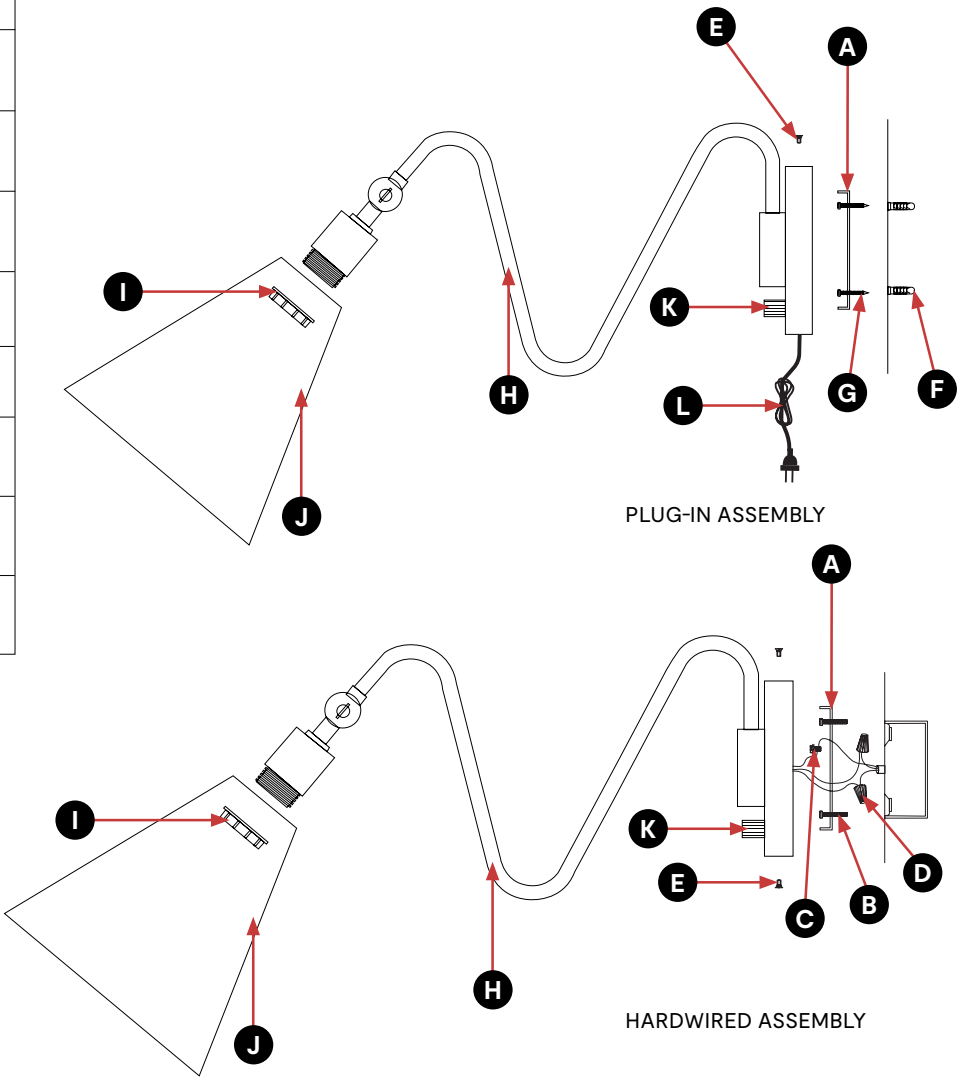

TOOLS REQUIRED (NOT INCLUDED)

Philips Head & Flat Blade Screwdrivers, Pliers, Wire Cutter/Stripper & Electrical Tape, Wire Connectors, & Adjustable Wrench.

NOTE: THE DRAWING OF THE CANOPY IS FOR REFERENCE ONLY.

JOON LOLOI

ASSEMBLY INSTRUCTIONS WIRED INSTALL

1. Attach the **MOUNTING PLATE (A)** unto the junction box using the **MOUNTING SCREWS (J)**. This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building.
2. Attach the Ground wire (**Green**) to the ground inside the outlet box (Generally green or bare copper wire) or the **GROUND SCREW (L)** on the **MOUNTING PLATE (A)**. **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
3. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (**WIRE NUT**) (**K**). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
4. Connect the black fixture leads to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
5. Attach the **FIXTURE ASSEMBLY (H)** to the **MOUNTING PLATE (A)** and secure with the **SET SCREWS (E)**.
6. Place the **SHADE (K)** onto the **FIXTURE ASSEMBLY (H)** and secure using the **RING (I)**.
7. Screw the **BULB (J)** up into the **SOCKET** of the fixture. **THIS FIXTURE IS RATED FOR 60 WATT TYPE A LAMP. (NOT INCLUDED) DO NOT EXCEED THE RECOMMENDED WATTAGE!**
8. Restore power to the outlet at the breaker or fuse box.
9. Turn the **SWITCH (L)** on the **FIXTURE ASSEMBLY (H)**.

ASSEMBLY INSTRUCTIONS PLUG-IN INSTALL

1. Mark holes on the wall for the **WALL ANCHORS (F)**, drill holes on the ceiling and push the **WALL ANCHORS (F)** into the wall.
2. Attach the **MOUNTING PLATE (A)** onto the wall, secure the **WOOD SCREWS (G)** into the **WALL ANCHORS (F)**.
3. Attach the **FIXTURE ASSEMBLY (H)** to the **MOUNTING PLATE (A)** and secure with the **SET SCREWS (E)**.
4. Place the **SHADE (K)** onto the **FIXTURE ASSEMBLY (H)** and secure using the **RING (I)**.
5. Screw the **BULB (J)** up into the **SOCKET** of the fixture. **THIS FIXTURE IS RATED FOR 60 WATT TYPE A LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
7. Restore power to the outlet at the breaker or fuse box.
8. Plug the **CORD (M)** into the wall outlet. Turn the **SWITCH (L)** on the **FIXTURE ASSEMBLY (H)**.

CARE INSTRUCTIONS

- Wipe clean with a soft, dry cloth.
- AVOID cleaners, harsh chemicals, scouring pads, etc. as these may cause damage to the chandelier finish.